

PRODUCT SHEET

Avanta Prima

Avanta Prima+ Preliminary

PRODUCT DESCRIPTION

Fully coated folding boxboard, GC2


MAIN END USES

Beautycare, Healthcare, Foods & Beverages

FEATURES

Printing methods Sheet-fed offset, Gravure, Flexo
Mill Metsä Board Kyro

STRUCTURE

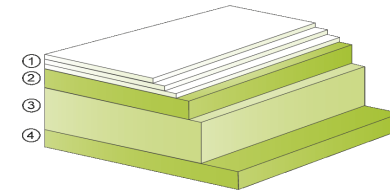

- 1) Triple coating
- 2) Bleached chemical pulp
- 3) Bleached chemi-thermo-mechanical pulp (BCTMP)
- 4) Bleached chemical pulp

TECHNICAL INFORMATION

PROPERTY, UNIT	METHOD	STANDARD	TOLERANCE	VALUES									
Grammage g/m ²		ISO 536	± 2%	205	215	225	240	250	265	285	310	330	355
Bending stiffness CD mNm	Taber 15°	ISO 2493	± 15%	5.1	6.0	7.0	7.9	9.1	10.9	13.7	17.0	19.5	23.7
Bending stiffness MD mNm	Taber 15°	ISO 2493	± 15%	9.7	11.4	13.3	15.4	16.9	20.4	26.2	32.0	38.0	47.0
Thickness mm		ISO 534	± 3%	0.325	0.350	0.375	0.400	0.425	0.450	0.500	0.550	0.600	0.650
Moisture content %		ISO 287	± 1.0	7.5	7.5	7.5	8.0	8.0	8.5	8.5	9.0	9.0	9.0
Smoothness top µm	PPS10	ISO 8791-4	max 1.3	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
Brightness top %	Illumination C/2°	ISO 2470-1	± 1	87	87	87	87	87	87	87	87	87	87
Brightness back %	Illumination C/2°	ISO 2470-1	± 2	74	74	74	74	74	74	74	74	74	74
Colour CIELAB L* top	Illumination C/2°	ISO 5631-1	± 1.0	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3	94.3
Colour CIELAB a* top	Illumination C/2°	ISO 5631-1	± 0.5	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
Colour CIELAB b* top	Illumination C/2°	ISO 5631-1	± 1.0	-1.5	-1.5	-1.5	-1.5	-1.5	-1.5	-1.5	-1.5	-1.5	-1.5
Gloss %	Hunter 75°	TAPPI T 480	± 5	50	50	50	50	50	50	50	50	50	50
Robinson test	12 months in original package	EN 1230-2		<1	<1	<1	<1	<1	<1	<1	<1	<1	<1

Tolerances, when specified, are based on 95% confidence limits on single mill measurements of random samples measured in manufacturing conditions. Metsä Board Paperboard mills have PEFC chain of custody, FSC chain of custody and FSC controlled wood certificates.

Issued 22.04.2013. | AVPRIM2