


GALA BRITE GC 2

Coated Folding Box Board With Manilla Back

Gsm	Thickness	Stiffness (Taber 15°)		COBB		Brightness	Moisture
	(mm)	CD	MD	Top	Back	TOP	
Tolerance	± 5%	± 10%	± 10%	G / m2	G / m2	± 2%	± 1,5%
235	0,395	6,0	11,8	25-45	50-80	84	7,5%
250	0,430	7,4	14,8	25-45	50-80	84	7,5%
270	0,470	9,5	19,0	25-45	50-80	84	7,5%
285	0,500	11,3	23,2	25-45	50-80	84	7,5%
305	0,540	14,0	28,0	25-45	50-80	84	7,5%
325	0,565	15,5	31,0	25-45	50-80	84	7,5%
340	0,615	18,0	36,0	25-45	50-80	84	7,5%
400	0,720	24,0	52,0	25-45	50-80	84	7,5%
Standart	TAPPI 411	TAPPI 489		TAPPI 441		ISO 2470	TAPPI 412

- Test Condition (ISO) : Temp 23±1° C, relative humidity 50 ± 2 %

PRODUCT CONTENT

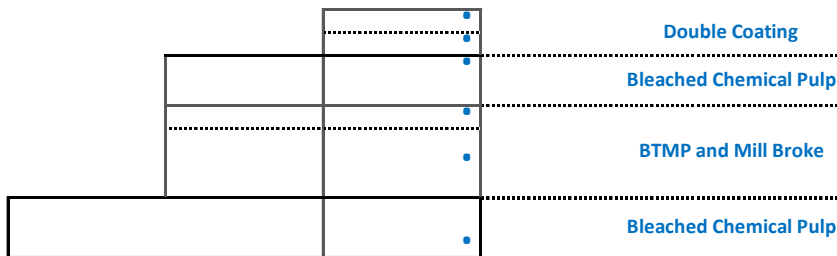

GALA BRITE