

PRODUCT SHEET

Tako

Tako CX White S

PRODUCT DESCRIPTION

Fully coated paperboard with coated back


MAIN END USES

Cigarettes

FEATURES

Printing methods Gravure, Sheet-fed offset
Mill Metsä Board Tako, Metsä Board Kyro

STRUCTURE

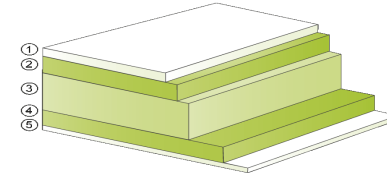

- 1) Multiple blade coating
- 2) Bleached chemical pulp
- 3) Chemi-thermo-mechanical pulp (CTMP)
- 4) Bleached chemical pulp
- 5) Blade coating

TECHNICAL INFORMATION

| PROPERTY, UNIT | METHOD | STANDARD | TOLERANCE | | | | VALUES |
|---------------------------|--------|----------|-----------|-------|-------|-------|--------|
| Grammage g/m ² | | ISO 536 | ± 4% | 200 | 215 | 225 | 240 |
| Thickness mm | | ISO 534 | ± 4% | 0.275 | 0.305 | 0.315 | 0.350 |

Tolerances, when specified, are based on 95% confidence limits on single mill measurements of random samples measured in manufacturing conditions.
Metsä Board Paperboard mills have PEFC chain of custody, FSC chain of custody and FSC controlled wood certificates.
Issued 01.05.2010. Supersedes sheet dated 01.05.2009 | TKCXWS, CXWS